

50/60HZ PCB MOUNT TRANSFORMERS EI RANGE

TYPE EI30/10.5 OUTPUT POWER 1.0VA

ELECTRICAL CHARACTERISTICS

Ferriwo Code	Secondary (V)	Current (A)	No-Load (output)	Pin Pr/Sec	Fig.
FWE130221	6	0.167	8.6	1-5/7-9	1
FWE130222	7.5	0.133	10.75	1-5/7-9	1
FWE130223	9	0.111	12.9	1-5/7-9	1
FWE130224	12	0.083	17.2	1-5/7-9	1
FWE130225	15	0.067	21.6	1-5/7-9	1
FWE130226	18	0.056	25.9	1-5/7-9	1
FWE130227	24	0.042	37.9	1-5/7-9	1
FWE130228	30	0.033	47.4	1-5/7-9	1
FWE130241	2 x 6	2 x 0.083	2 x 8.60	1-5/6-7,9-10	2
FWE130242	2 x 7.5	2 x 0.067	2 x 10.75	1-5/6-7,9-10	2
FWE130243	2 x 9	2 x 0.056	2 x 12.90	1-5/6-7,9-10	2
FWE130244	2 x 12	2 x 0.042	2 x 19.00	1-5/6-7,9-10	2
FWE130245	2 x 15	2 x 0.033	2 x 23.60	1-5/6-7,9-10	2
FWE130246	2 x 18	2 x 0.028	2 x 24.90	1-5/6-7,9-10	2
FWE130247	2 x 24	2 x 0.021	2 x 37.90	1-5/6-7,9-10	2

SPECIFICATION:


- It is miniaturized to be easily PCB mounted.
- It has very high insulation of 4000Vrms Hi-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C.
- Potted under vacuum
- Split-Bobbin Winding
- Sort-Circuit-Proof
- Primary: 230V/115V
- Frequency 50/60Hz
- Temperature class to 70°C/B
- Weight: 0.070kg

COMMON APPLICATIONS:

- Medical equipment
- Industrial equipment
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

TECHNICAL INFORMATION

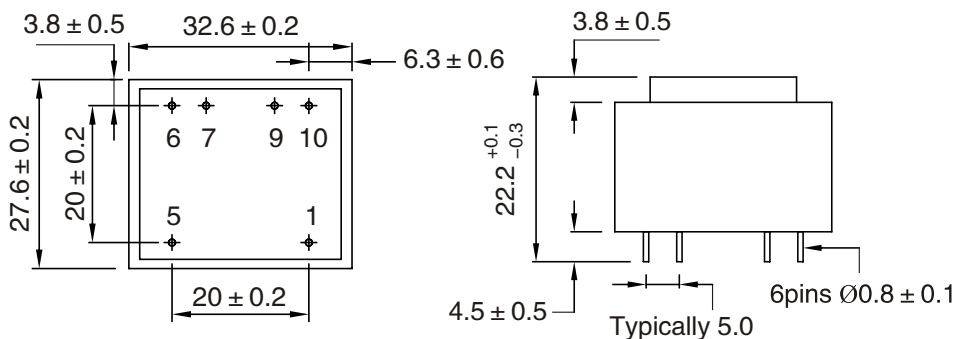

Recommended Drill-hole Diameter for 1.3mm pins

