

50/60HZ PCB MOUNT TRANSFORMERS EI RANGE

TYPE EI30/15.5 OUTPUT POWER 2.0VA

ELECTRICAL CHARACTERISTICS

Ferriwo Code	Secondary (V)	Current (A)	No-Load (output)	Pin Pr/Sec	Fig.
FWE130521	6	0.333	9.3	1-5/7-9	1
FWE130522	7.5	0.267	11.63	1-5/7-9	1
FWE130523	9	0.222	13.95	1-5/7-9	1
FWE130524	12	0.167	18.6	1-5/7-9	1
FWE130525	15	0.133	23.25	1-5/7-9	1
FWE130526	18	0.111	27.9	1-5/7-9	1
FWE130527	24	0.083	37.2	1-5/7-9	1
FWE130528	30	0.067	46.5	1-5/7-9	1
FWE130541	2 x 6	2 x 0.167	2 x 9.3	1-5/6-7,9-10	2
FWE130542	2 x 7.5	2 x 0.133	2 x 11.63	1-5/6-7,9-10	2
FWE130543	2 x 9	2 x 0.111	2 x 13.95	1-5/6-7,9-10	2
FWE130544	2 x 12	2 x 0.083	2 x 18.60	1-5/6-7,9-10	2
FWE130545	2 x 15	2 x 0.067	2 x 23.25	1-5/6-7,9-10	2
FWE130546	2 x 18	2 x 0.056	2 x 27.90	1-5/6-7,9-10	2
FWE130547	2 x 24	2 x 0.042	2 x 37.20	1-5/6-7,9-10	2

SPECIFICATION:


- It is miniaturized to be easily PCB mounted.
- It has very high insulation of 4000Vrms Hi-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C.
- Potted under vacuum
- Split-Bobbin Winding
- Sort-Circuit-Proof
- Primary: 230V/115V
- Frequency 50/60Hz
- Temperature class to 70°C/B
- Weight: 0.100kg

COMMON APPLICATIONS:

- Medical equipment
- Industrial equipment
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

TECHNICAL INFORMATION

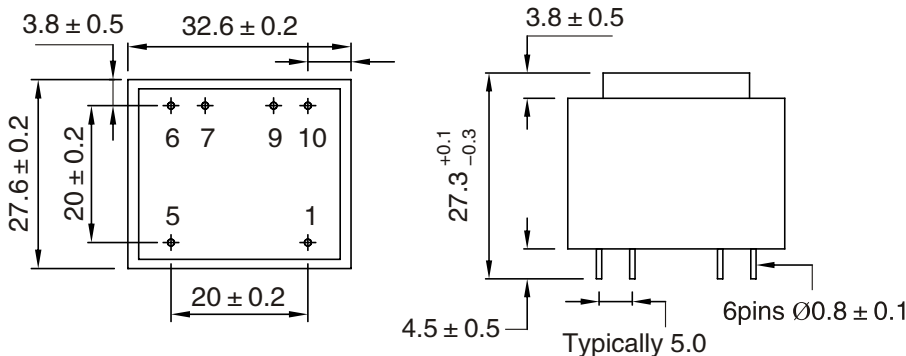

Recommended Drill-hole Diameter for 1.3mm pins

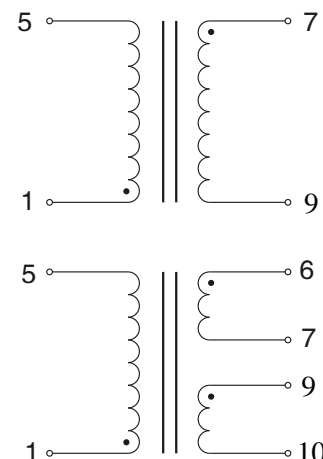


Fig 1

Fig 2