

# 50/60HZ PCB MOUNT TRANSFORMERS EI RANGE

## TYPE EI30/15.5 OUTPUT POWER 2.3VA

### ELECTRICAL CHARACTERISTICS

Ferriwo Code	Secondary (V)	Current (A)	No-Load (output)	Pin Pr/Sec	Fig.
FWE130621	6	0.383	9.3	1-5/7-9	1
FWE130622	7.5	0.307	11.63	1-5/7-9	1
FWE130623	9	0.256	13.95	1-5/7-9	1
FWE130624	12	0.192	18.6	1-5/7-9	1
FWE130625	15	0.153	23.25	1-5/7-9	1
FWE130626	18	0.128	27.9	1-5/7-9	1
FWE130627	24	0.096	37.2	1-5/7-9	1
FWE130628	30	0.077	46.5	1-5/7-9	1
FWE130641	2 x 6	2 x 0.192	2 x 9.3	1-5/6-7,9-10	2
FWE130642	2 x 7.5	2 x 0.153	2 x 11.63	1-5/6-7,9-10	2
FWE130643	2 x 9	2 x 0.128	2 x 13.95	1-5/6-7,9-10	2
FWE130644	2 x 12	2 x 0.096	2 x 18.60	1-5/6-7,9-10	2
FWE130645	2 x 15	2 x 0.077	2 x 23.25	1-5/6-7,9-10	2
FWE130646	2 x 18	2 x 0.064	2 x 27.90	1-5/6-7,9-10	2
FWE130647	2 x 24	2 x 0.048	2 x 37.20	1-5/6-7,9-10	2

### SPECIFICATION:


- It is miniaturized to be easily PCB mounted.
- It has very high insulation of 4000Vrms Hi-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C.
- Potted under vacuum
- Split-Bobbin Winding
- Sort-Circuit-Proof
- Primary: 230V/115V
- Frequency 50/60Hz
- Temperature class to 70°C/B
- Weight: 0.100kg

### COMMON APPLICATIONS:

- Medical equipment
- Industrial equipment
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

### PHYSICAL CHARACTERISTICS

### TECHNICAL INFORMATION

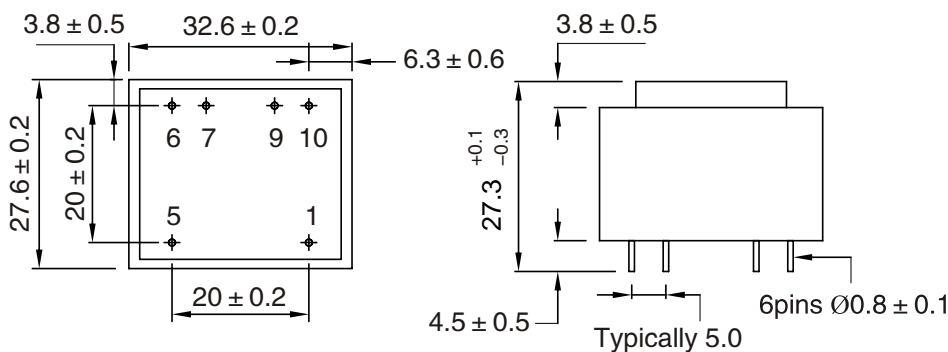

Recommended Drill-hole Diameter for 1.3mm pins

