

50/60HZ PCB MOUNT TRANSFORMERS EI RANGE

TYPE EI60/25.0 OUTPUT POWER 25.0VA

ELECTRICAL CHARACTERISTICS

| Ferriwo Code | Secondary (V) | Current (A) | No-Load (output) | Pin Pr/Sec | Fig. |
|--------------|---------------|-------------|------------------|----------------|------|
| FWE160321 | 6 | 4.167 | 6.9 | 1-7/9-13 | 1 |
| FWE160322 | 7.5 | 3.333 | 8.63 | 1-7/9-13 | 1 |
| FWE160323 | 9 | 2.778 | 10.35 | 1-7/9-13 | 1 |
| FWE160324 | 12 | 2.083 | 13.8 | 1-7/9-13 | 1 |
| FWE160325 | 15 | 1.667 | 17.25 | 1-7/9-13 | 1 |
| FWE160326 | 18 | 1.389 | 20.7 | 1-7/9-13 | 1 |
| FWE160327 | 24 | 1.042 | 27.6 | 1-7/9-13 | 1 |
| FWE160328 | 30 | 0.833 | 34.5 | 1-7/9-13 | 1 |
| FWE160341 | 2 x 6 | 2 x 2.083 | 2 x 6.90 | 1-7/8-10,12-14 | 2 |
| FWE160342 | 2 x 7.5 | 2 x 1.667 | 2 x 8.63 | 1-7/8-10,12-14 | 2 |
| FWE160343 | 2 x 9 | 2 x 1.389 | 2 x 10.35 | 1-7/8-10,12-14 | 2 |
| FWE160344 | 2 x 12 | 2 x 1.042 | 2 x 13.80 | 1-7/8-10,12-14 | 2 |
| FWE160345 | 2 x 15 | 2 x 0.833 | 2 x 17.25 | 1-7/8-10,12-14 | 2 |
| FWE160346 | 2 x 18 | 2 x 0.694 | 2 x 20.70 | 1-7/8-10,12-14 | 2 |
| FWE160347 | 2 x 24 | 2 x 0.521 | 2 x 27.60 | 1-7/8-10,12-14 | 2 |


SPECIFICATION:

- It is miniaturized to be easily PCB mounted.
- It has very high insulation of 4000Vrms Hi-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C.
- Potted under vacuum
- Split-Bobbin Winding
- Sort-Circuit-Proof
- Primary: 230V/115V
- Frequency 50/60Hz
- Temperature class to 50°C/B
- Weight: 0.600kg

COMMON APPLICATIONS:

- Medical equipment
- Industrial equipment
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

PHYSICAL CHARACTERISTICS

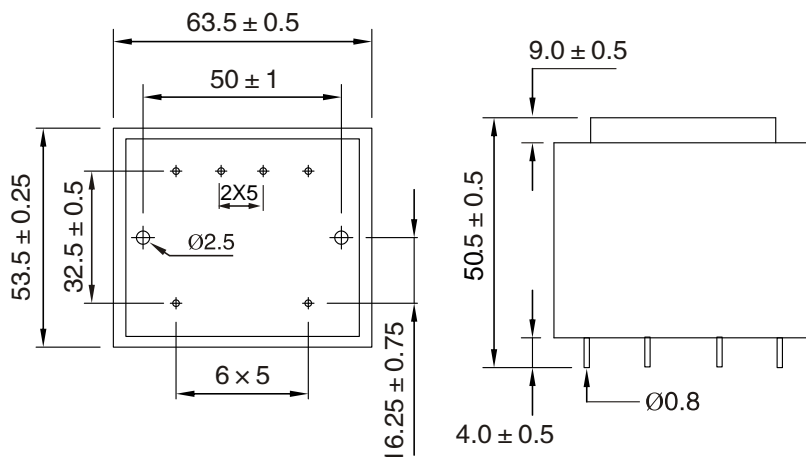

Recommended Drill-hole Diameter for 1.3mm pins
Recommended Drill-hole Diameter for Mountings=4mm

TECHNICAL INFORMATION

