


SWITCHING TRANSFORMERS

FWPTEFD SERIES

15.0~30.0

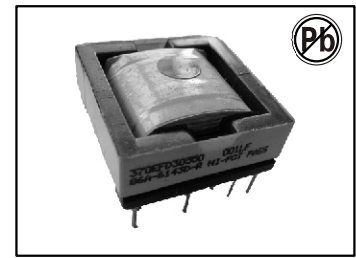

FEATURES:

- Horizontal installation
- Multi out-put applied in denseness installation

OPTIONS:

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS:


- Drive transformers
- Main transformers
- Smoothing chokes
- General purpose use
- Switching power supplies
- AC-DC, DC-DC converters

ELECTRICAL CHARACTERISTICS

Part No.	Type	No. of Terminal pins	Dimensions (mm)						Max. output (VA)
			Max	Max	Max	±0.3	±0.5	±0.1	
			A	B	C	D	E	F	
FWPTEFD15-A	H	8	17	18	9.5	3.7	13.7	0.6	5
FWPTEFD15-B	H	8	17	18	9.5	3.75	13.75	0.6	5
FWPTEFD15-C	H	8	17	18	9.5	3.8	13.7	0.6	5
FWPTEFD20-A	H	8	22	23	11.0	5.0	17.5	0.6	18
FWPTEFD20-B	H	9	22	23	11.0	5.0	17.5	0.6	18
FWPTEFD20-C	H	10	22	26	15.0	3.8	23.8	0.6	18
FWPTEFD25-A	H	10	27	28	13.0	5.0	22.45	0.8	45
FWPTEFD25-B	H	10	27	28	15.0	5.0	22.5	0.8	45
FWPTEFD30-A	H	12	32	33	14.0	5.0	27.4	0.8	70
FWPTEFD30-B	H	12	32	36	18.0	5.0	30.0	0.8	70
FWPTEFD30-C	H	12	32	37	14.0	5.0	32.0	0.8	70

Note: The output power is only for forward model and the frequency at 100kHz

PHYSICAL CHARACTERISTICS

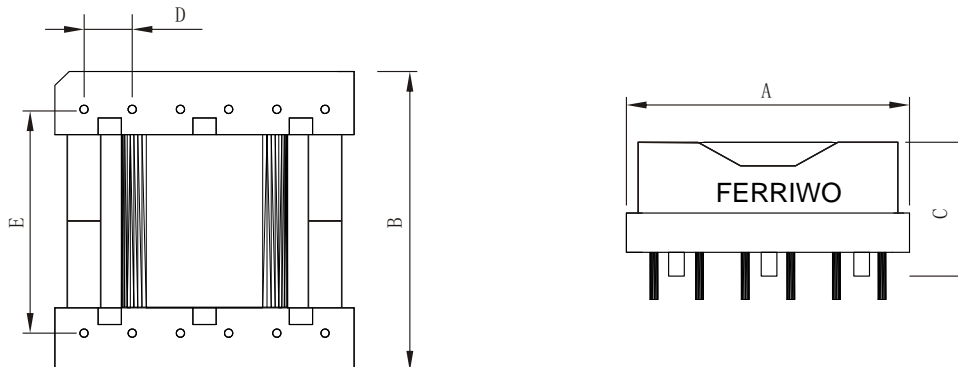

Type H